

◆ **Product pictures**



◆ **Main Parameter**

Specification	
Product NO.:	RS-C3A
LED chip	3W, Epi-star LED chip
CCT	6000-6500K
Lumen	≥ 280 LM
Light beam angle	120 degree
Battery type	4400 mAH Li battery (2pcs 18650)
Charge port	DC3.5 / MICRO USB
Charge voltage and Current	5VDC / 1A
Output port	USB
Output voltage and current	5VDC / 1A
Work time	Strong light time ≥ 6-8h; weak light time ≥ 12h
Three-gear Switch	Strong light, weak light
Irradiated area	9 sq.m
Light effect	Round facula
Work temperature	From -10°Cd to 60°C
IP rating	IP43 waterproof
Main material	ABS + PC
String	Round string, green
Light body color	White / green / blue / yellow
Product weight	190g

## ◆ Application


It is suit for outdoor work, camping, tent.

## ◆ Product description

1. Use the streamline shape design, then it will be hold easily.
2. It is very suit for outdoor to illumination and can provide the strong light and weak light.
3. Use the CREE led chip and use the special lampshade, then the light beam angle is very smooth.
4. Use the rechargeable Li battery and the battery capacity is 4400 mAH.
5. Can use the 5VDC charger and MICRO charger to charge for this lamp.



6. Can dimmer from 50%-100% and can turn on / off easily.

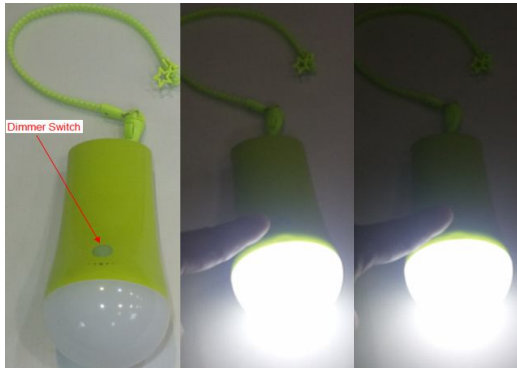


7. Can charger for the mobile phone.



8. Use the IC control the current.

## ◆ Irradiation effect photo

Light Source Test Report

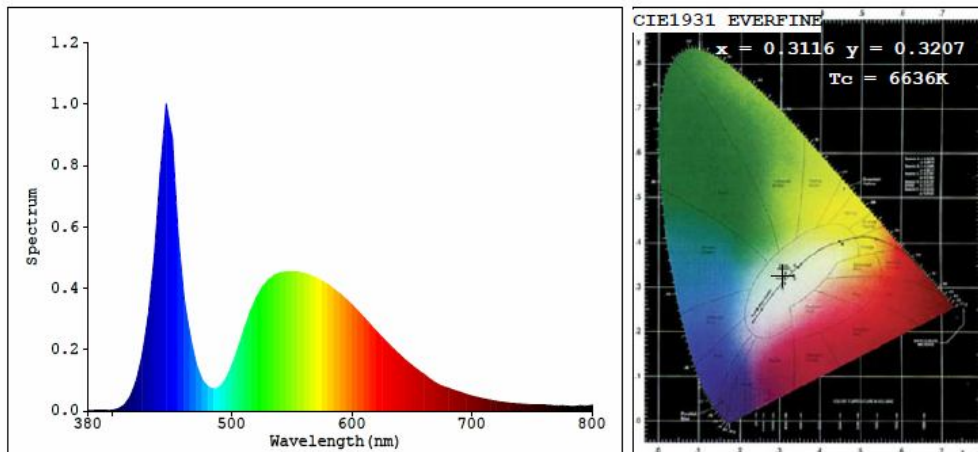

## ◆ Application picture



## ◆ Noted

- 1、 This product is a portable lamp, don't put it into the water, Prohibit to put it into the fire.
- 2、 It work on the 5VDC voltage, Don't use it with more than 5VDC voltage and prohibit it connect to alternating current.
- 3、 It have 3 switch state, the strong light model and weak light model and SOS model.
- 4、 It can place 6 months with statically, when it is full charge.

## ◆ Package

Inner box: 85X70X180 MM, use the blister package, 1PC RS-C3A bulb include 1PC connect wire and IPHONE, MICRO, MINI, NOKIA conversion plug.

Outbox size: 420X420X380mm, 60pcs / ctns